



WIND
SALICE



Wind is characterised by compactness and elegant design.

Combining the highest levels of performance with smooth and perfectly controlled movement, Wind is small, unobtrusive and elegantly designed. This compact lift system has strong functional appeal and takes up a minimum of valuable storage space.

Wind is versatile and suitable for a vast range of furniture applications: office furniture, kitchens, bathrooms, living- and bedroom furniture.

This system incorporates a soft close mechanism for decelerated closing or the Push self-opening system for handle-less doors. Wind is available in numerous attractive finishes.












INDUSTRIAL PACKING	PART NUMBER	CARTON	PALLET
	<p>SOFT CLOSE FRAKINX_SN9 SPRING STRENGTH ↑</p>	<p>1 carton contains: 18 cups · 9 systems for right side 9 systems for left side · 9 plates for right side 9 plates for left side · Fixing screws included</p>	<p>24 cartons</p>
	<p>PUSH OPENING FRAKINP_SN9 SPRING STRENGTH ↑</p>		

DOOR-SET PACKING	PART NUMBER	CARTON	PALLET
	<p>SOFT CLOSE FRAKFEX_SN9 SPRING STRENGTH ↑</p>	<p>1 carton contains: 2 cups · 1 system for right side 1 system for left side · 1 plate for right side 1 plate for left side · Fixing screws and template for cabinet side drilling included</p>	<p>360 cartons</p>
	<p>PUSH OPENING FRAKFEP_SN9 SPRING STRENGTH ↑</p>		

COVER	PART NUMBER	CARTON	PALLET
	<p>INDUSTRIAL PACKING SRXA78A_SNXXI COLOUR OF THE COVER ↑</p>	<p>1 carton contains: 9 covers for right system 9 covers for left system cover caps included</p>	<p>24 cartons</p>
	<p>DOOR-SET PACKING SRXA78A_SNXXF COLOUR OF THE COVER ↑</p>	<p>1 carton contains: 1 cover for right system 1 cover for left system cover caps included</p>	

SPRING IDENTIFICATION

PART NUMBER FOR SPRING STRENGTH

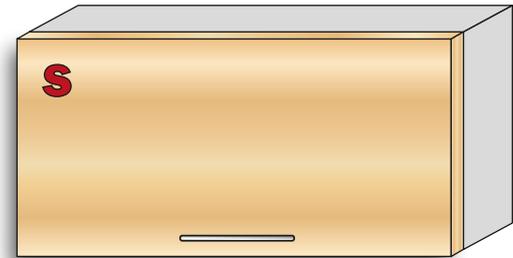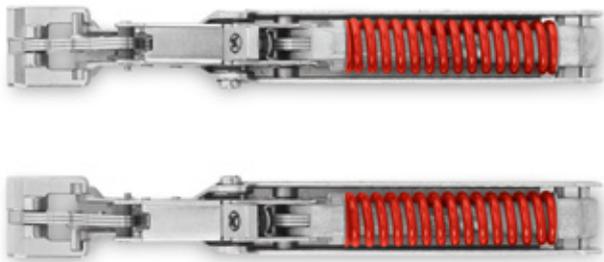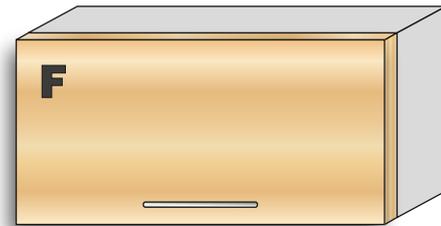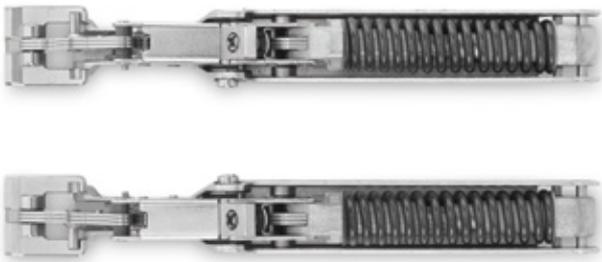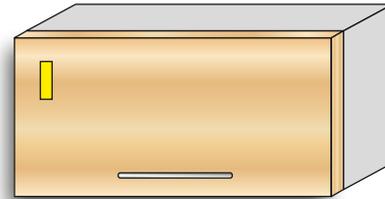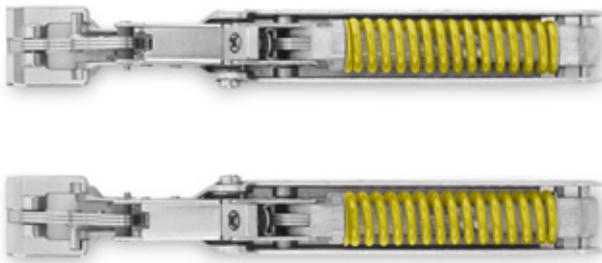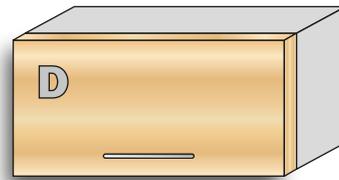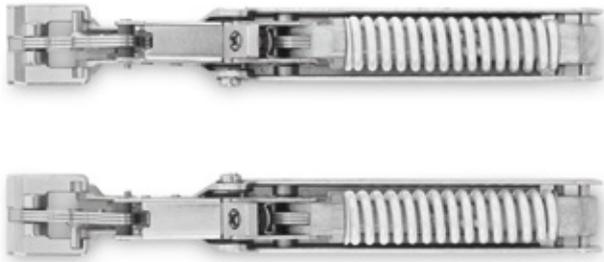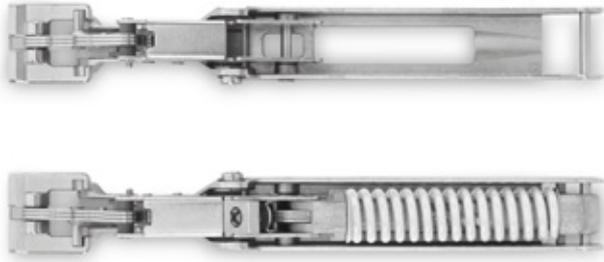

Colour of the cover

SRXA78A1SNXXI

White
Cover cap: nickel-plated finish



SRXA78AISNXXI

Stainless steel
Cover cap: nickel-plated finish



SRXA78AMSNXXI

Grey
Cover cap: nickel-plated finish



SRXA78ACSNXXI

Champagne
Cover cap: nickel-plated finish



SRXA78A0SNXXI

Satin metal black
Cover cap: titanium finish




SRXA78ANSNXXI


Glossy metal black
Cover cap: titanium finish




Drilling patterns

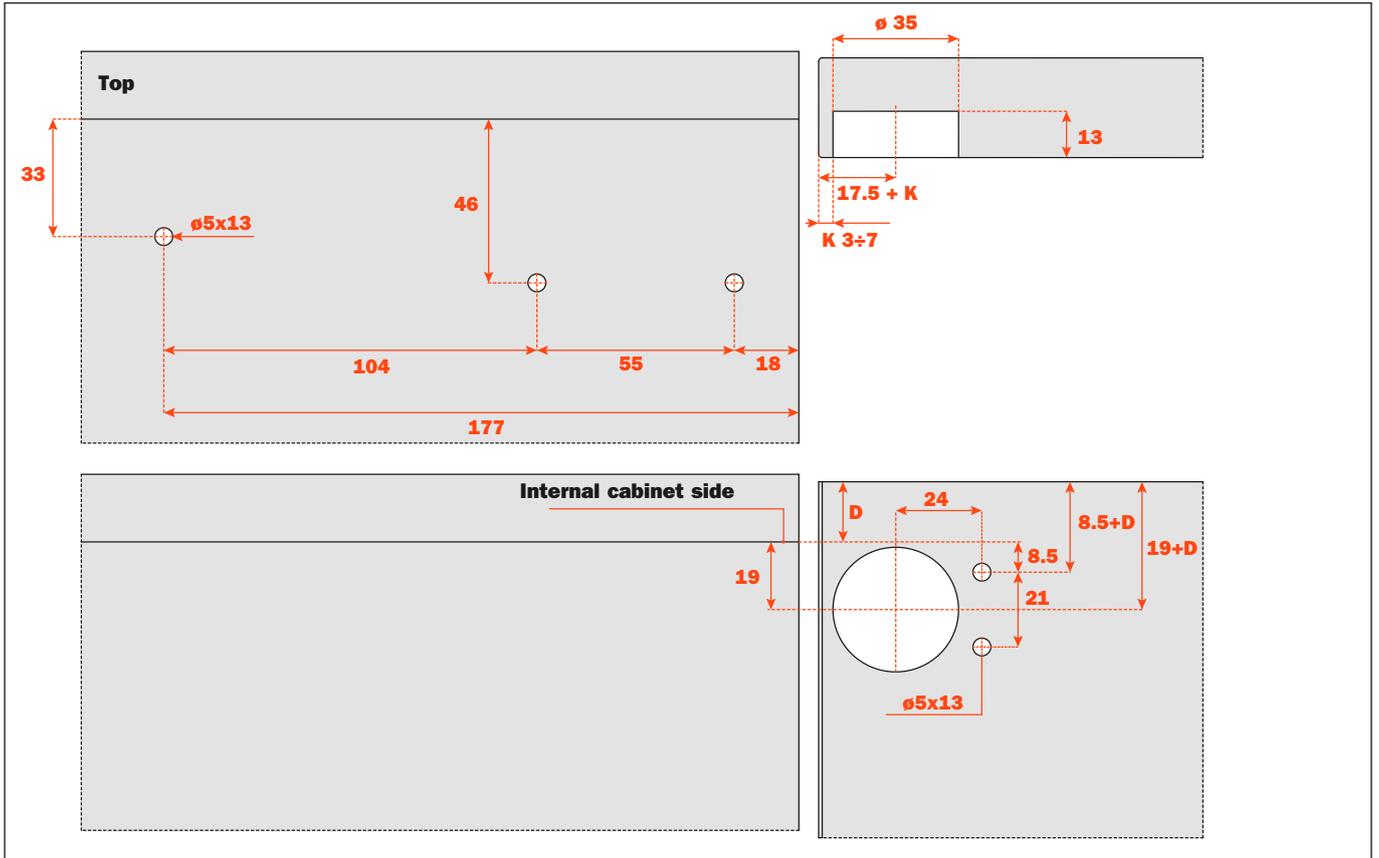


Space needed to open the door

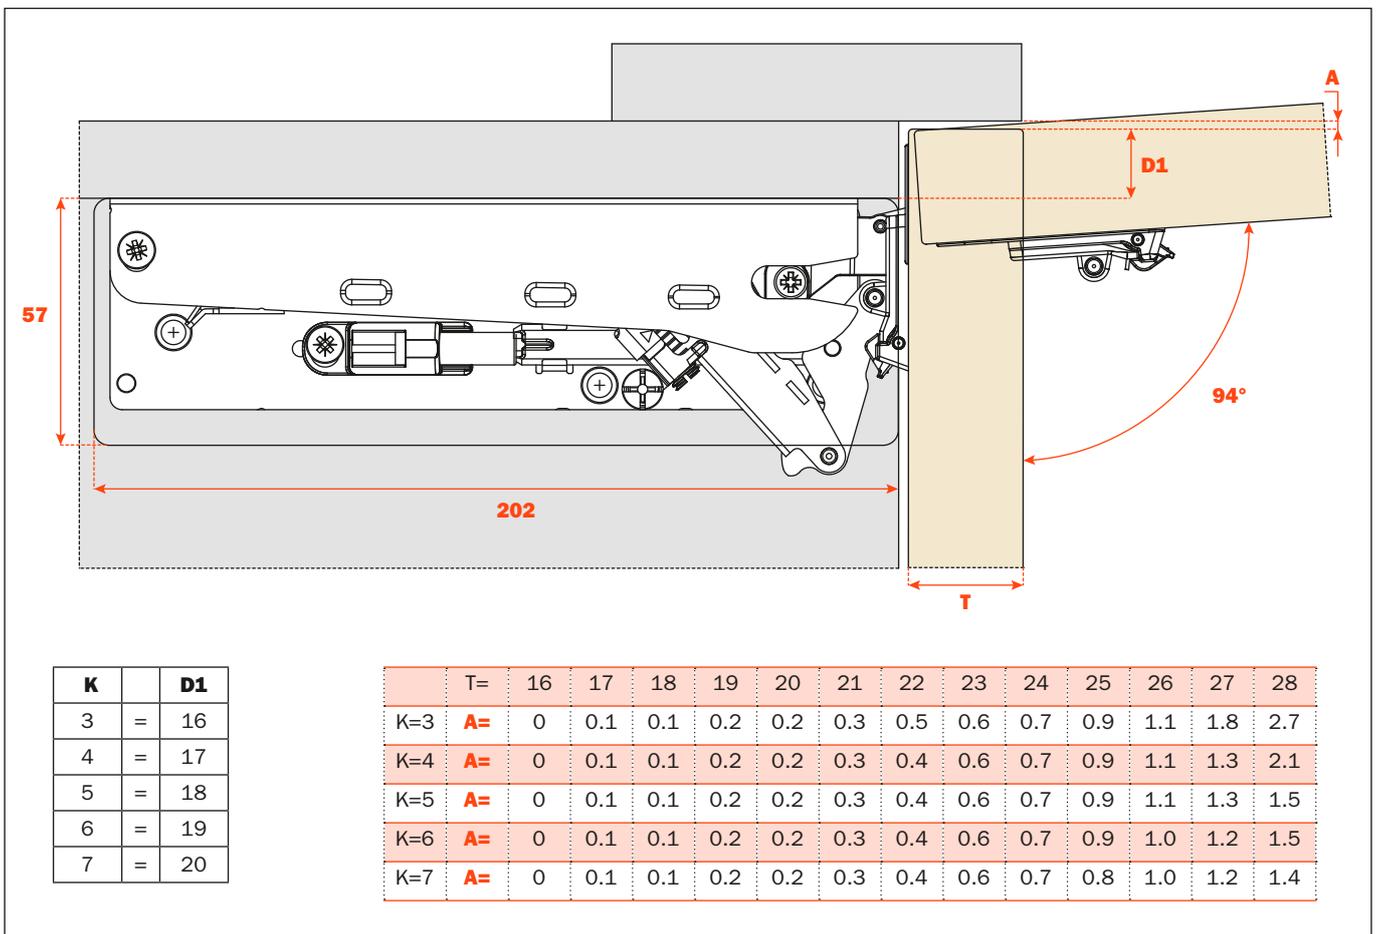

Fixing the plates to the cabinet sides

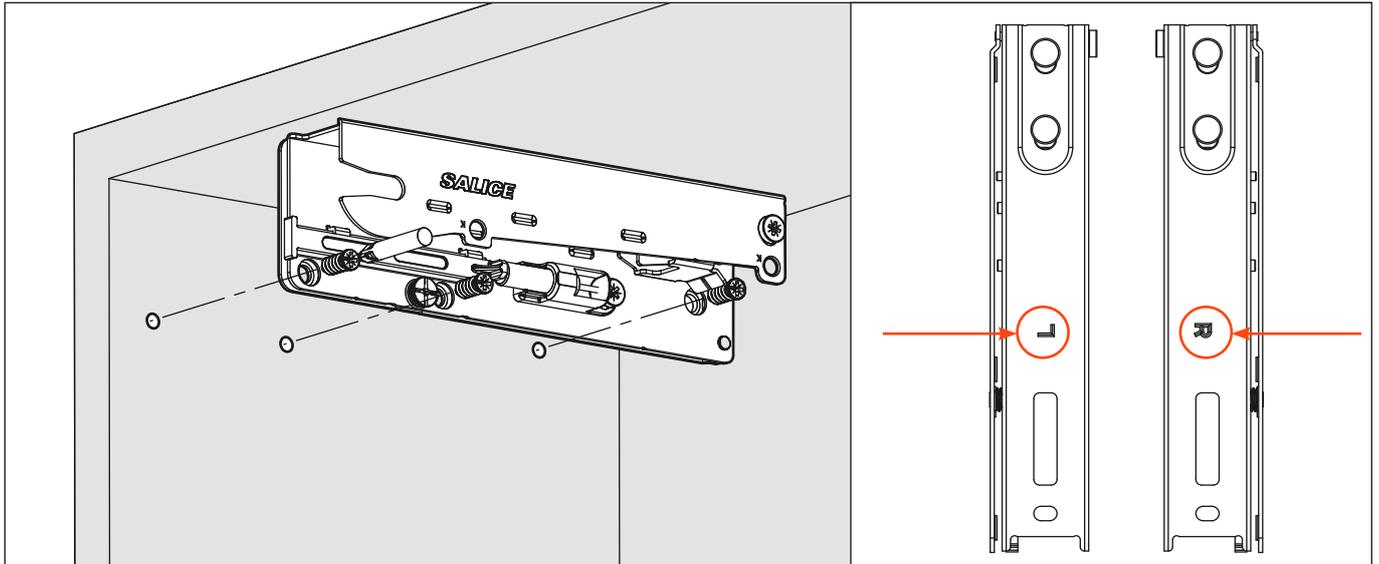


Fixing the cups to the door

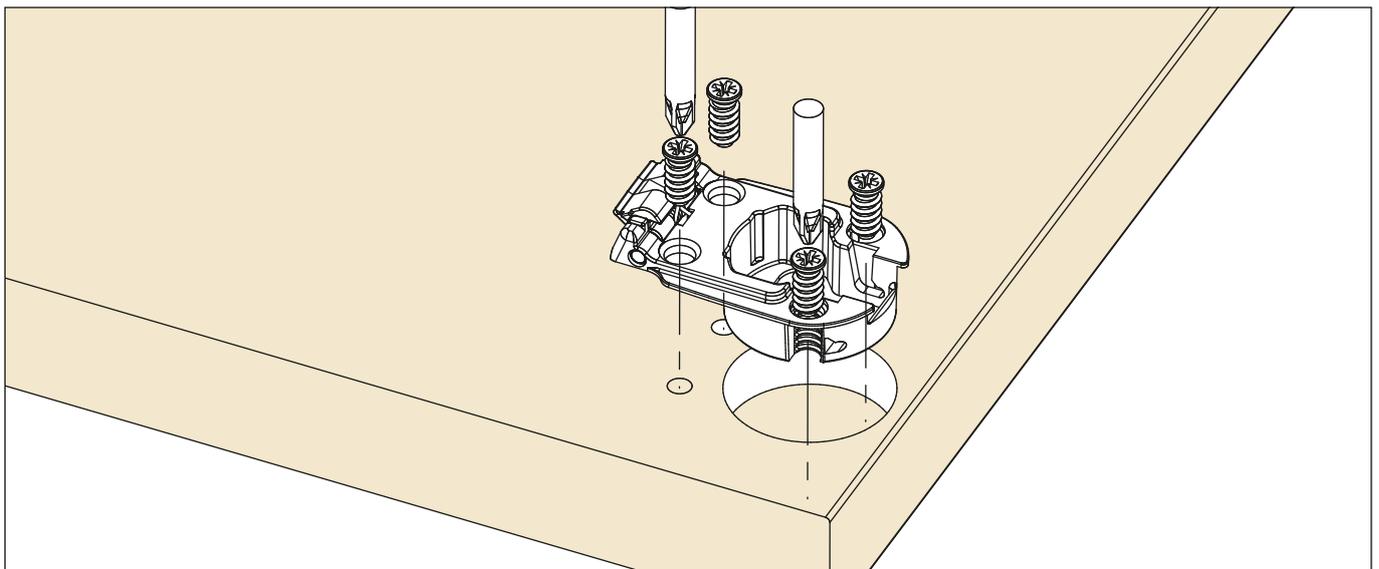


Deploying the system to the cups

Connecting the system to the cups. This operation is tool free.

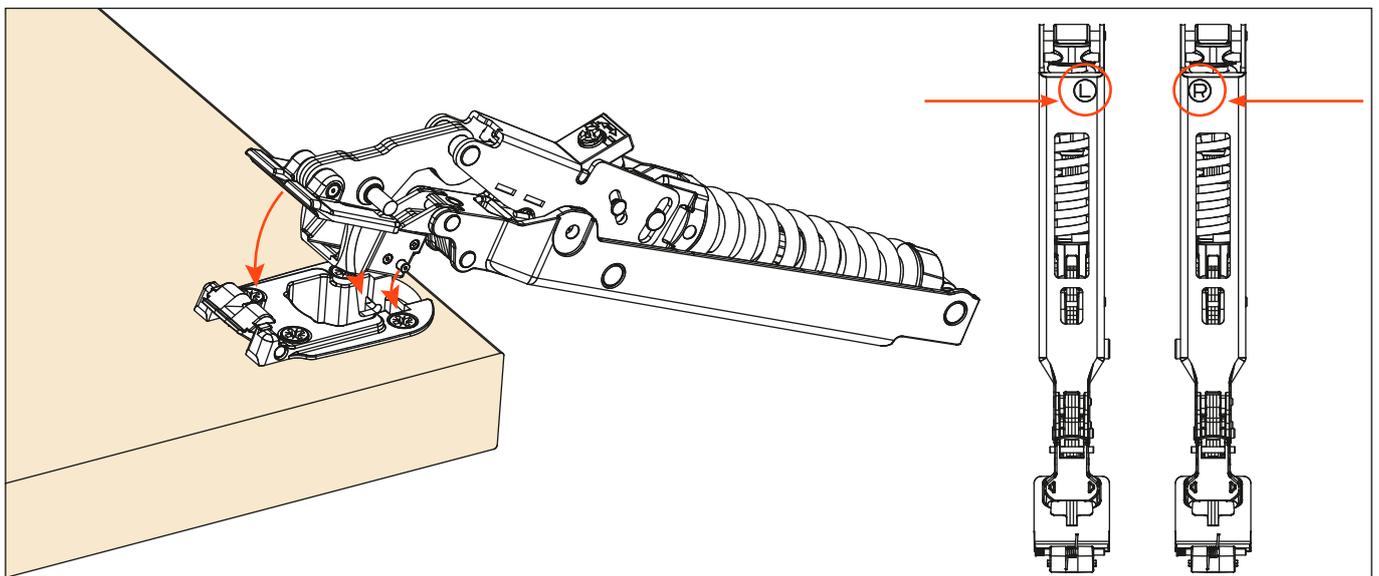


Installing the system to the plates

Installing the system till the back fixing. This operation is tool free.

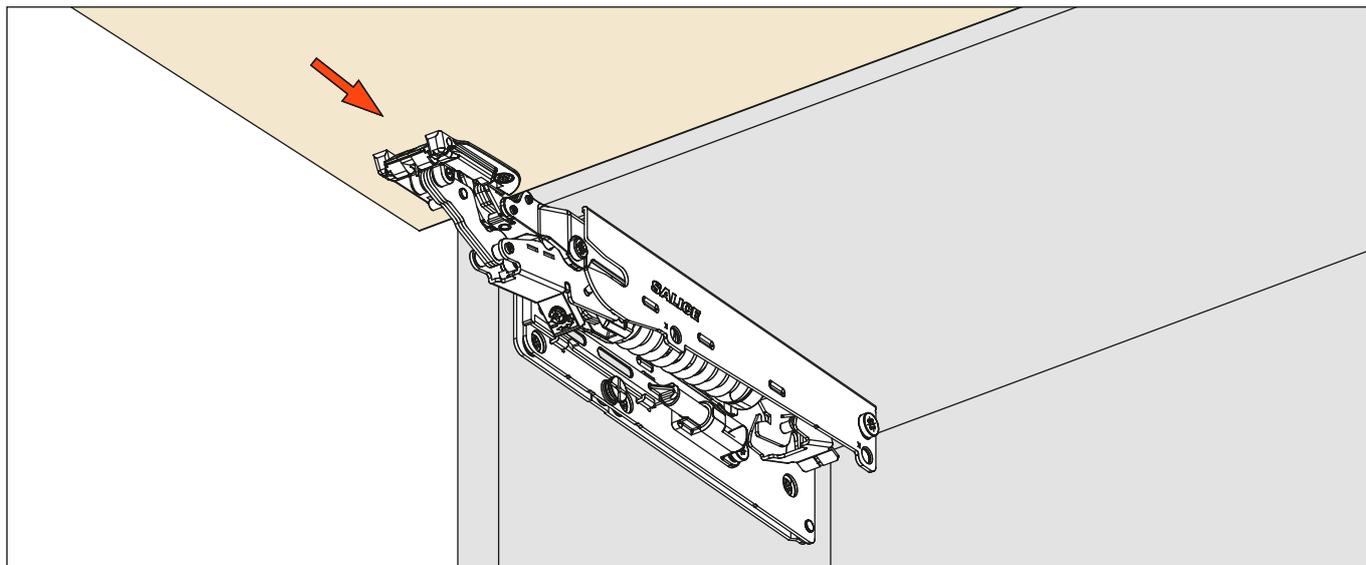

Installing the covers

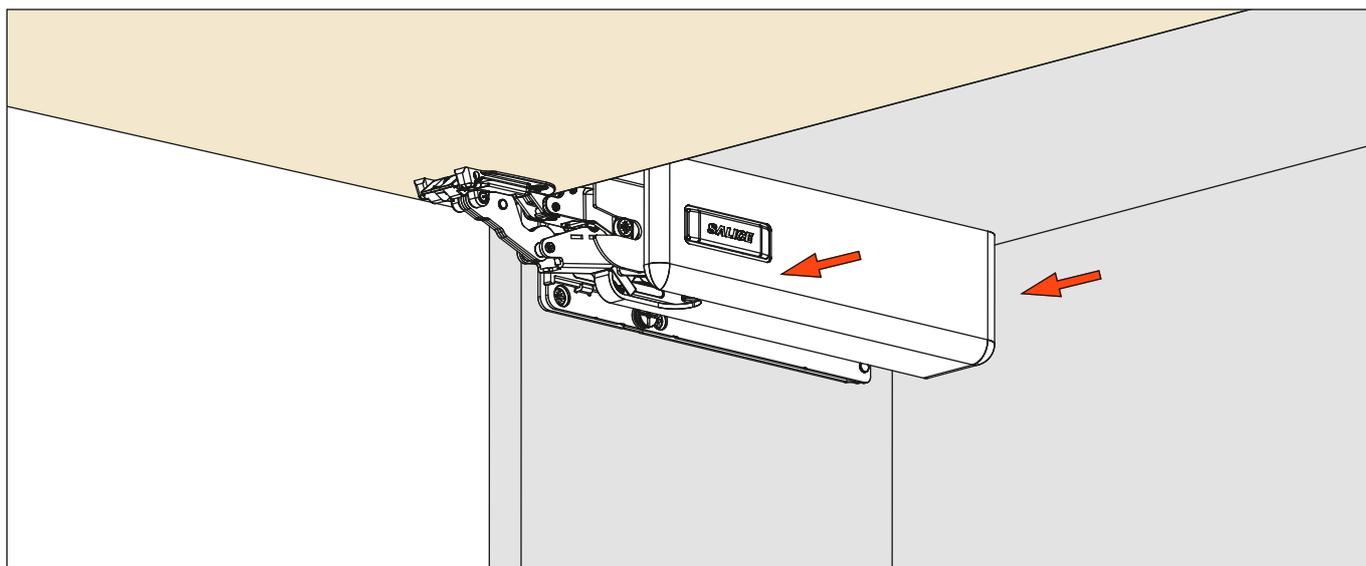


WARNING ! Security cable ties

Remove the cable ties only at the end of the assembly.
Use the instructions and the QR Code attached to the systems.




Removal of the covers

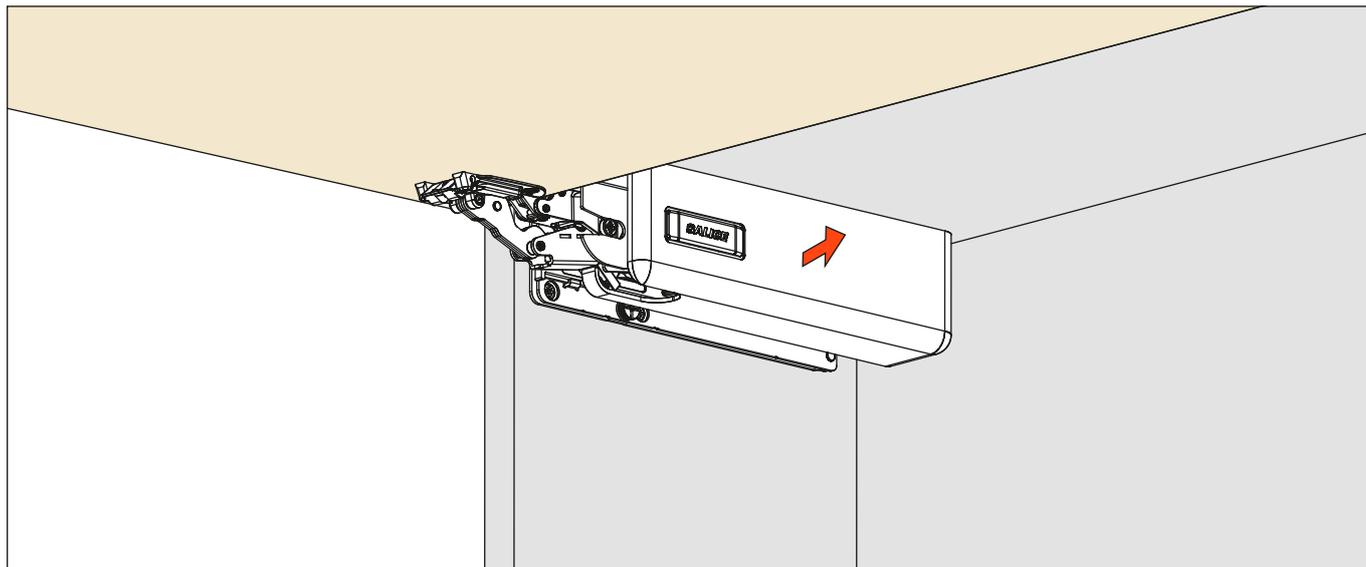


Disassembly of the system

Press the back lever and pull out the system. This operation is tool free.

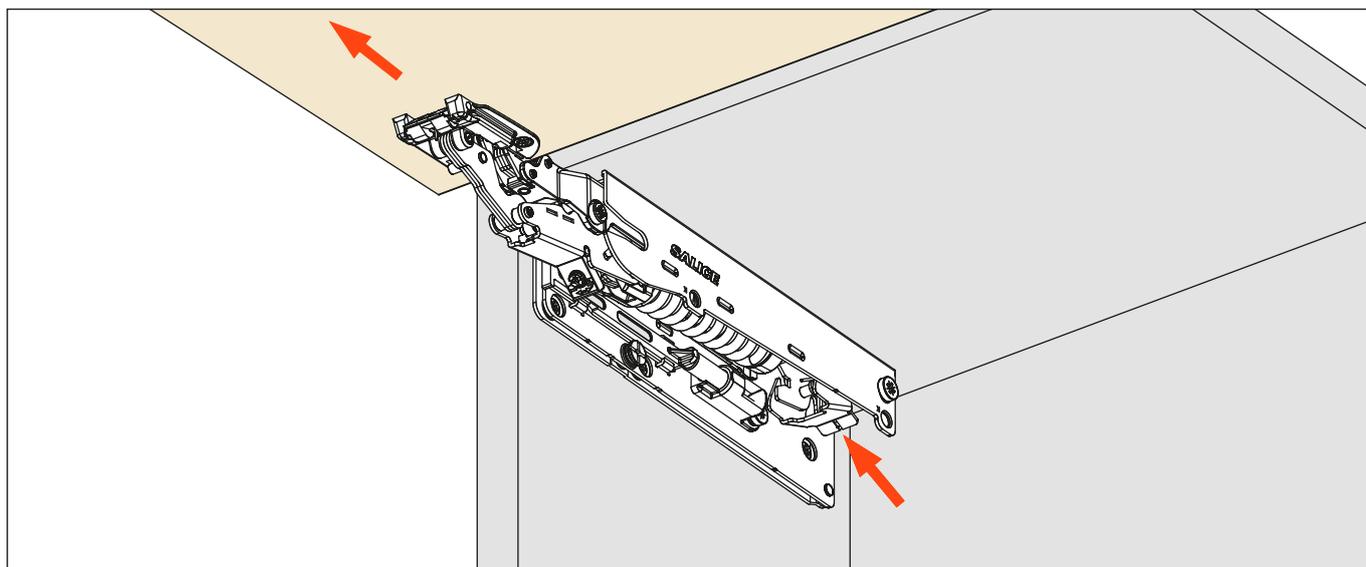


Unfasten the system from the cups

Disconnecting the system from the cups. This operation is tool free.

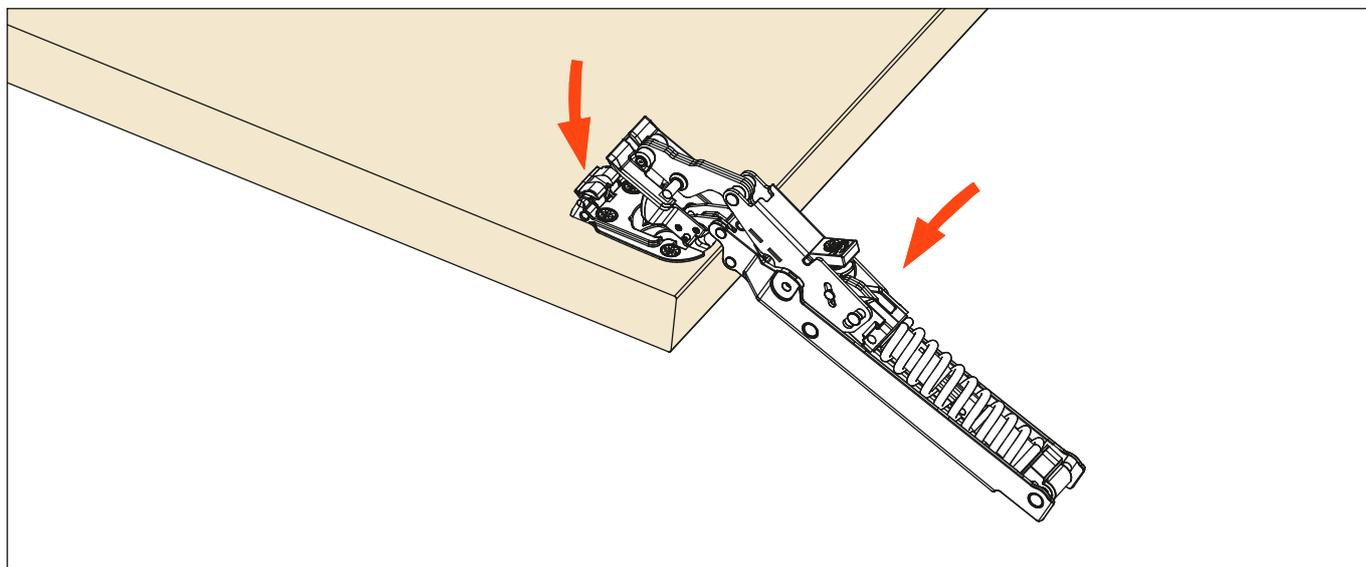

1 - adjustment of the spring strength


2 - adjustment of the decelerating effect

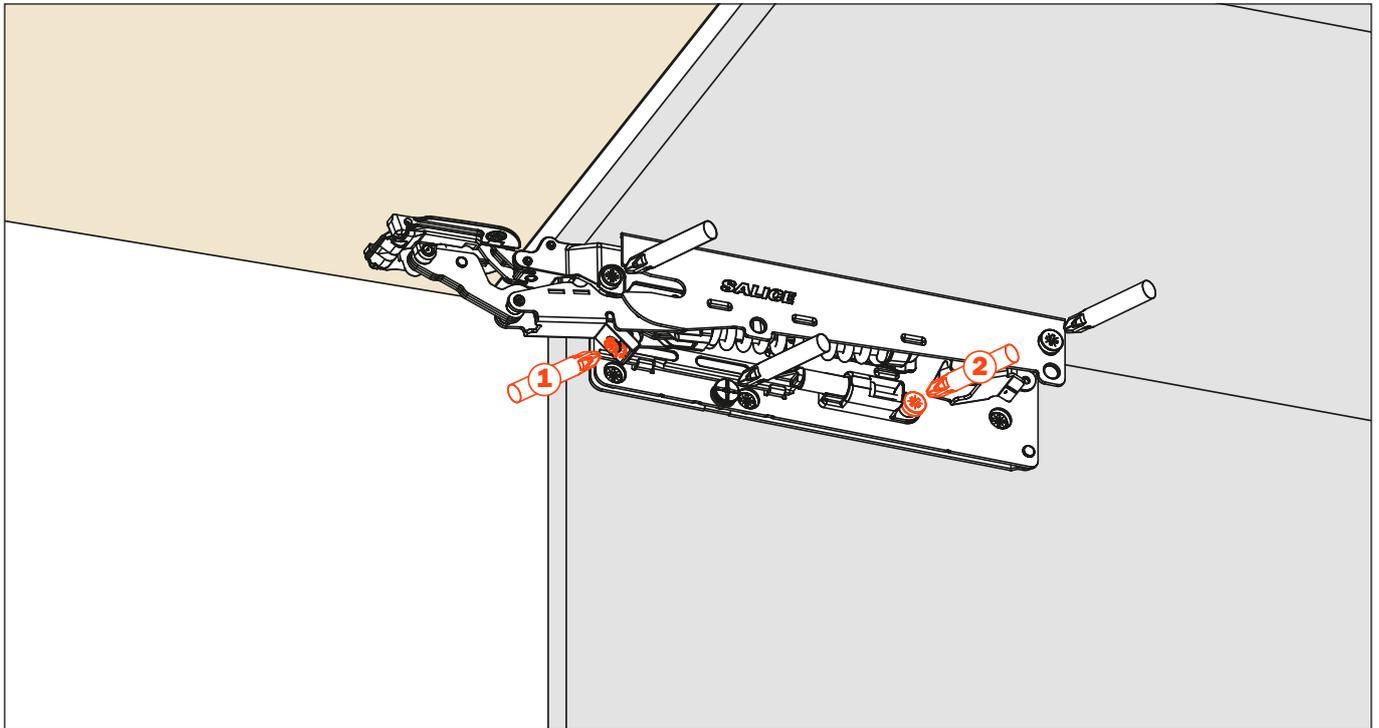

3 - height adjustment of the door from - 2 to +2

4 - sideways adjustment of the door from - 2 to +2

5 - depth adjustment of the door from - 1 to +3

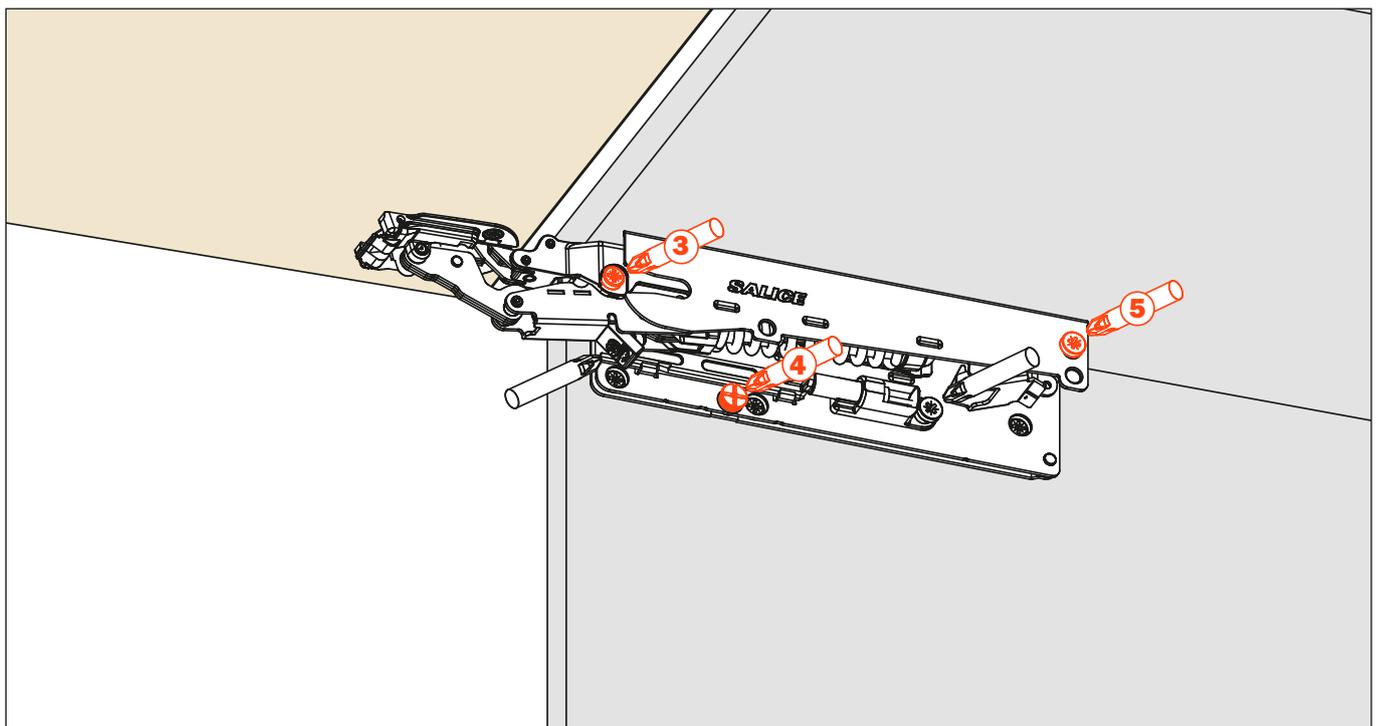

Magnetic Push



Magnetic Push - Release device to be recessed and retaining catches

DPMSNB - beige



DPMSNG - grey



Release device.
ø 10 mm, 40 mm length.

Packing

Boxes 250 pcs.
Cartons 1.500 pcs.

DPASNB - beige



DPASNG - grey



Release device to be used to increase the magnetic holding strength. It must always be used together with the DPM. The suggested position of the DPM is the point of pressure on the door. The DPA can be positioned at any point along the opening edge of the door.
ø 10 mm, 40 mm length.

Packing

Boxes 250 pcs.
Cartons 1.500 pcs.

DP39XXG



Adjustable magnetic retaining catch.
ø16.6 mm

Packing

Boxes 250 pcs.

DP28SN9



Retaining catch to be inserted.
ø 11.5 mm.

Packing

Boxes 250 pcs.

DP38XX91




Retaining catch with adhesive.
20x14 mm.

Packing

Boxes 250 pcs.

Application of the release device to be recessed

Drill a hole \varnothing 10 mm and min. 40 mm depth in the top, the side or the base panel of the cabinet.
Insert the release device into the hole.

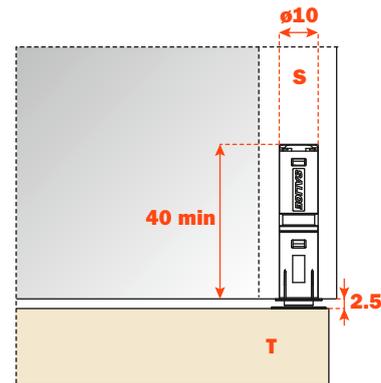


Adjustable retaining catch to be inserted

The retaining catch DP39 is itself magnetic and together with the magnetism of the release device DPM considerably increase (30%) the holding strength of the door against the cabinet side, thus avoiding accidental openings.


For the installation it is necessary to drill a hole \varnothing 15 mm and 11 mm depth in the door.

Depth adjustment from -0.5 mm to +2.5 mm.

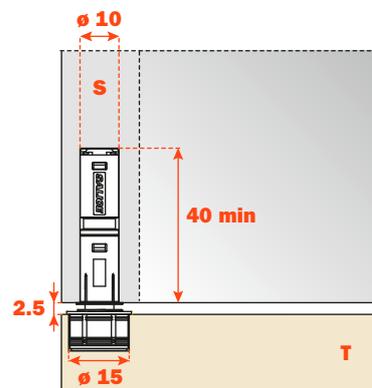

Retaining catch to be inserted

Apply the retaining catch to the magnetic release device.
Close the door.
The point of the retaining catch will show where to insert it.
Reopen the door and press the retaining catch.

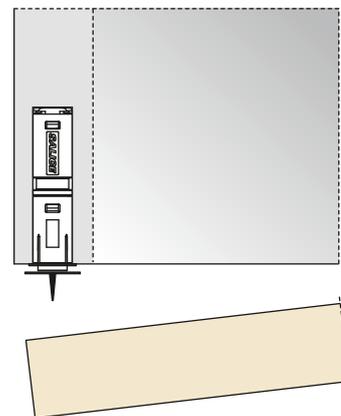

Retaining catch with adhesive strip


Apply the retaining catch to the magnetic release device. Remove the protective strip from the adhesive. Close the door. In this way the retaining catch is positioned on the door. Reopen the door and apply a firm pressure to the retaining catch to ensure a correct installation.

ATTENTION:


For a correct application and to ensure optimal endurance, we suggest these guidelines are followed:

- 1 - clean and degrease the door surface where the retaining catch is to be installed;
- 2 - remove the protective strip from the adhesive;
- 3 - place the retaining catch in position, in a place that is at room temperature $\geq 10^\circ$ and apply a firm pressure for 10-15 seconds.


After few seconds from the installation the retaining catch is suitable for the use.
After 24h the max. hold is attained.

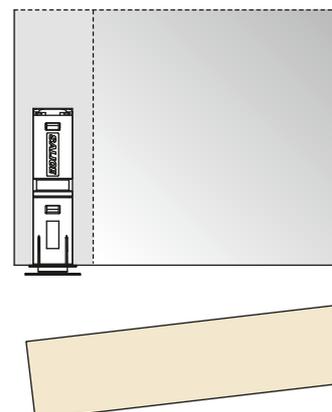

For cabinets over 400 mm high,
it is suggested that one release device is used.






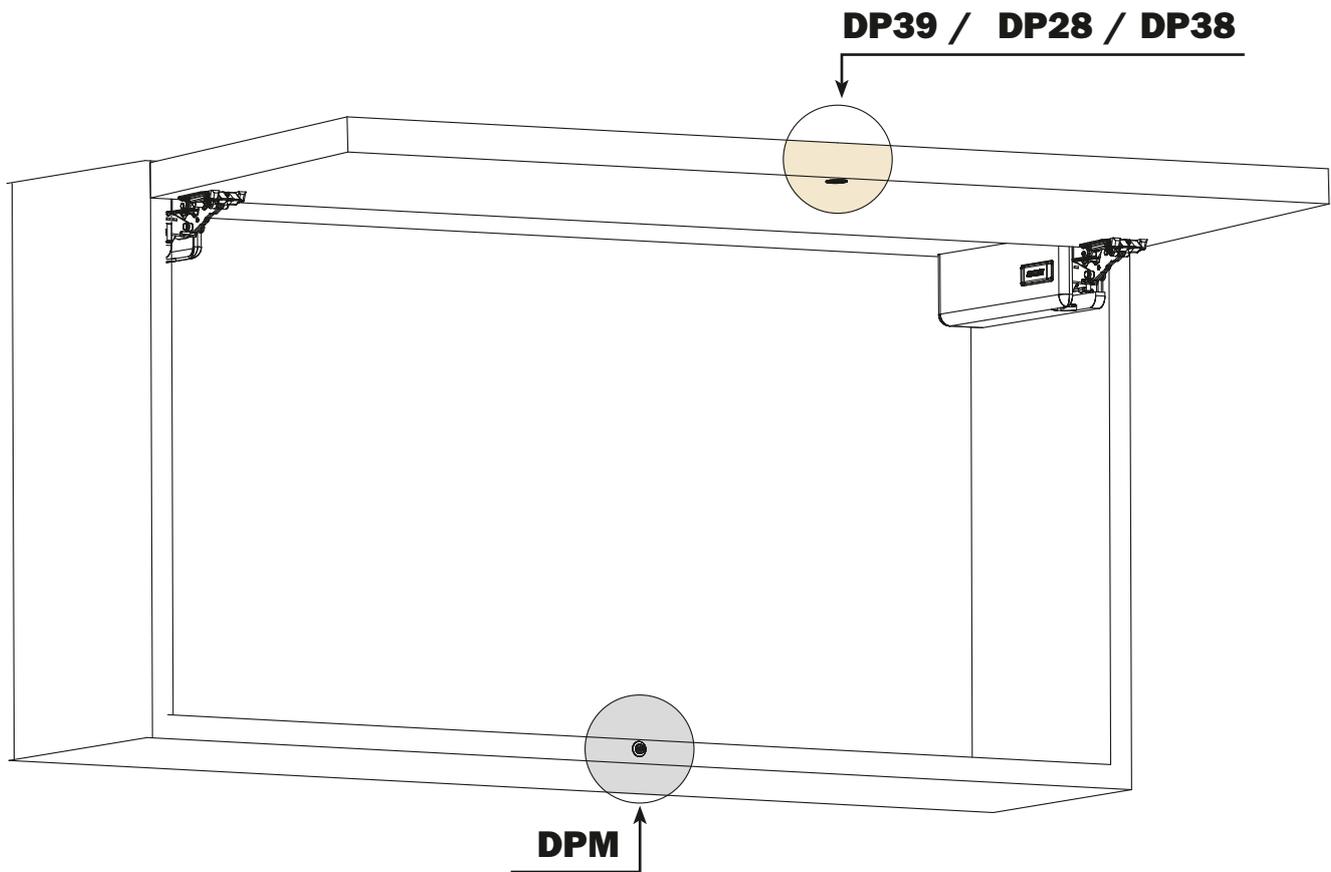






For cabinets less than 400 mm high,
it is suggested that two release devices are used.

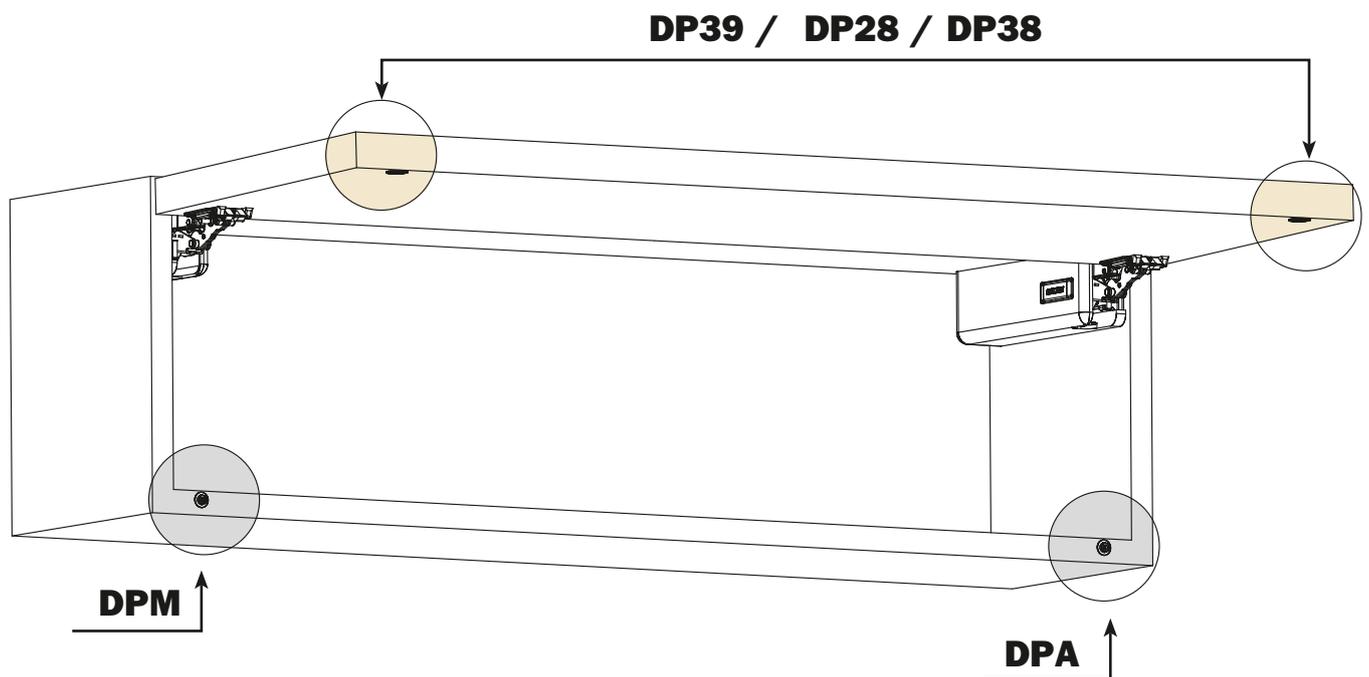

Chart

Chart to define the exact system to be used in relationship with the dimension and the weight of the door.
 We suggest to verify the application always with a practical assembly trial.

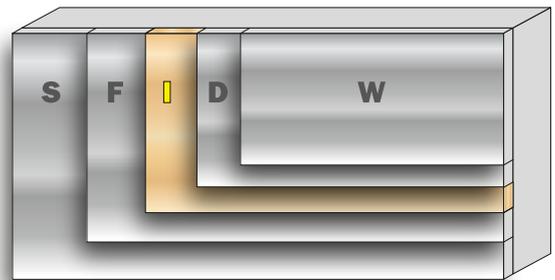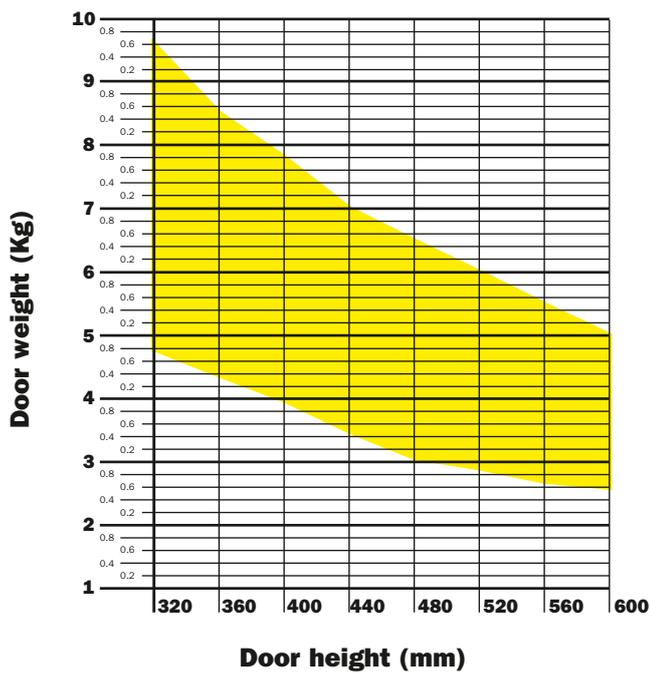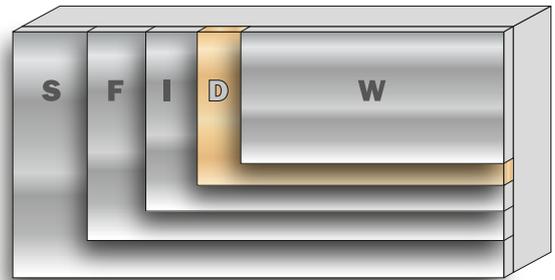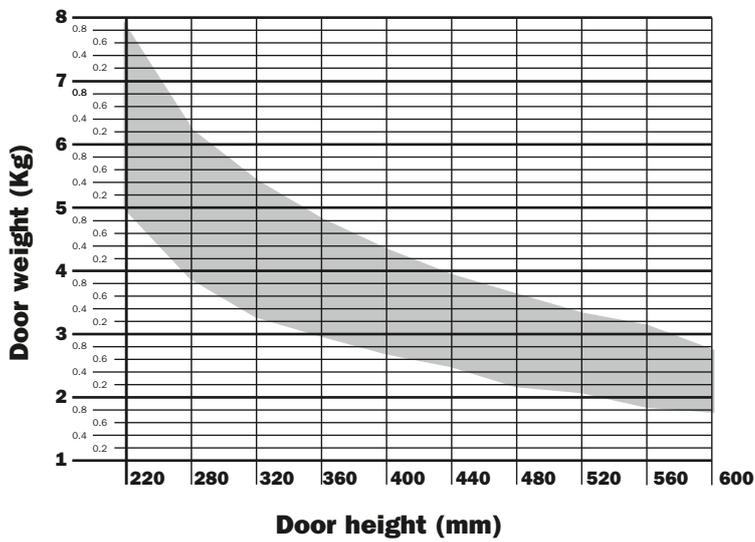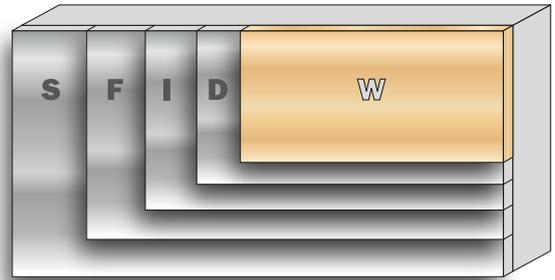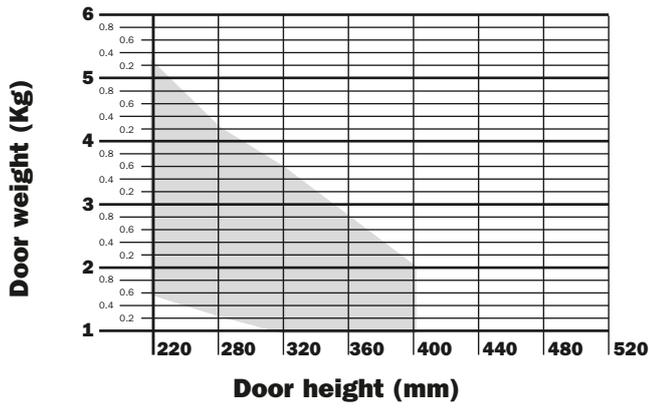

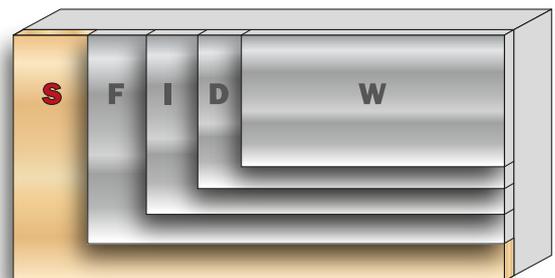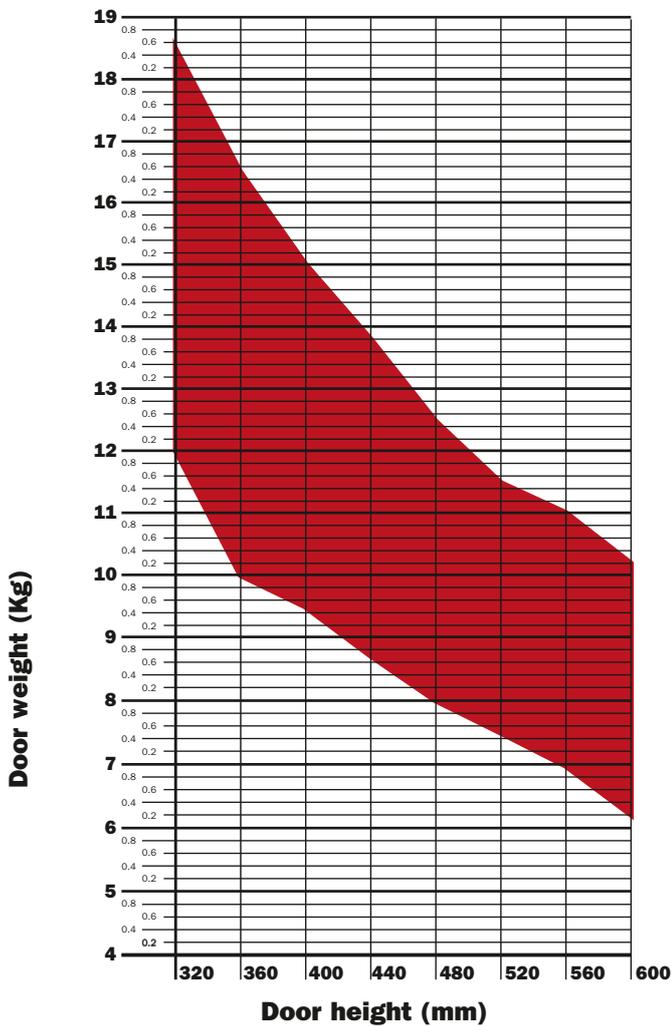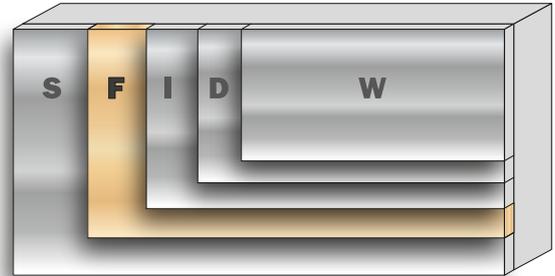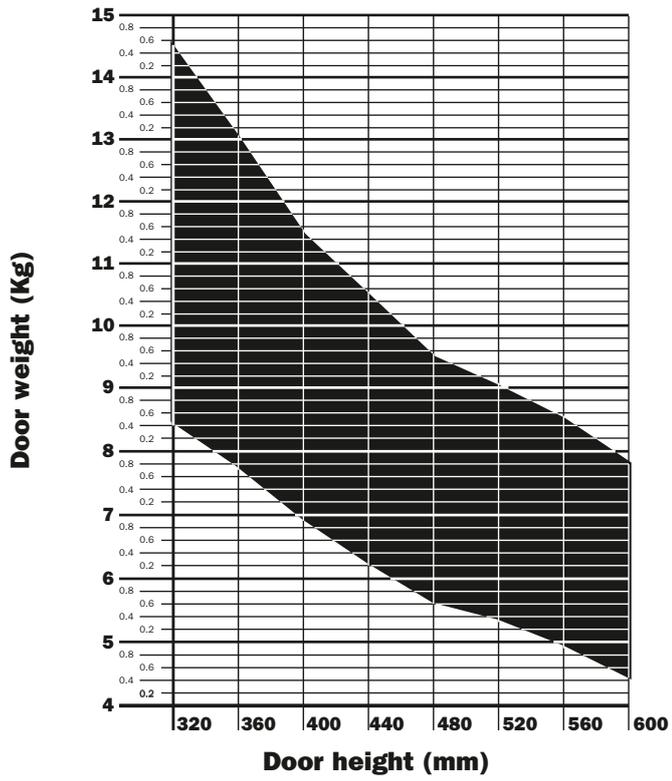

ARTURO SALICE S.p.A.

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424
FAX 031 791508
info.salice@salice.com
www.salice.com

DEUTSCHE SALICE GMBH

RUDOLF DIESEL STR. 10
POSTFACH 1154
74382 NECKARWESTHEIM
TEL. 07233 9807-0
FAX. 07233 9807-16
info.salice@deutschesalice.de
www.deutschesalice.de

DEUTSCHE SALICE GMBH

VERKAUFSBÜRO NORD
RINGSTRASSE 36/A30 CENTER
32584 LÖHNE
TEL. 05731 15608-0
FAX. 05731 15608-10
vknord@deutschesalice.de
www.deutschesalice.de

SALICE FRANCE S.A.R.L.

ROUTE DE GOA ZAC LES 3 MOULINS
06600 ANTIBES
TEL. 0493 330069
FAX. 0493 330141
info.salice@salicefrance.com
www.salicefrance.com

SALICE ESPAÑA, S.L.U.

CALLE COPÉRNICO, 11
POLÍGONO INDUSTRIAL
COLL DE LA MANYA
08403 GRANOLLERS (BARCELONA)
TEL. 938 45 88 61
FAX 938 49 11 97
info.salice@saliceespana.es
www.saliceespana.es

SALICE UK LTD.

KINGFISHER WAY
HINCHINGBROOKE BUSINESS PARK
HUNTINGDON CAMBS PE 29 6FN
TEL. 01480 413831
FAX. 01480 451489
info.salice@saliceuk.co.uk
www.saliceuk.co.uk

SALICE AMERICA INC.

2123 CROWN CENTRE DRIVE
CHARLOTTE NC. 28227
TEL. 704 8417810
FAX. 704 8417808
info.salice@saliceamerica.com
www.saliceamerica.com

SALICE CANADA INC.

4025 SLADEVIEW CRESCENT
UNIT # 7-9
MISSISSAUGA, ONTARIO L5L 5Y1
TEL. 905 8208787
FAX. 905 8207226
info.salice@salicecanada.com
www.salicecanada.com

SALICE CHINA (SHANGHAI) CO. LTD.

1st FLOOR, B1 BLDG 928 MINGZHU ROAD
XUJING, QINGPU DISTRICT
SHANGHAI 201702 - CHINA
Tel. 021 3988 9880
Fax 021 3988 9882
info.salice@salicechina.com
www.salicechina.com